



U.S. DEPARTMENT OF
ENERGY

OFFICE OF
**ENVIRONMENTAL
MANAGEMENT**

Vitrification Facility Demolition

Craig Rieman, Deputy Director
DOE-West Valley

March 8, 2017

Vitrification Facility Location



- **Vitrification Facility Background**
- **Review of Regulatory Requirements**
- **Demolition Preparations**
- **Demolition Approach**
- **Waste Management and Disposal**
- **Status and Schedule**




Vitrification Facility Background

- Single-purpose facility constructed to vitrify the WVDP's liquid high-level waste (HLW)



Vitrification Facility Exterior

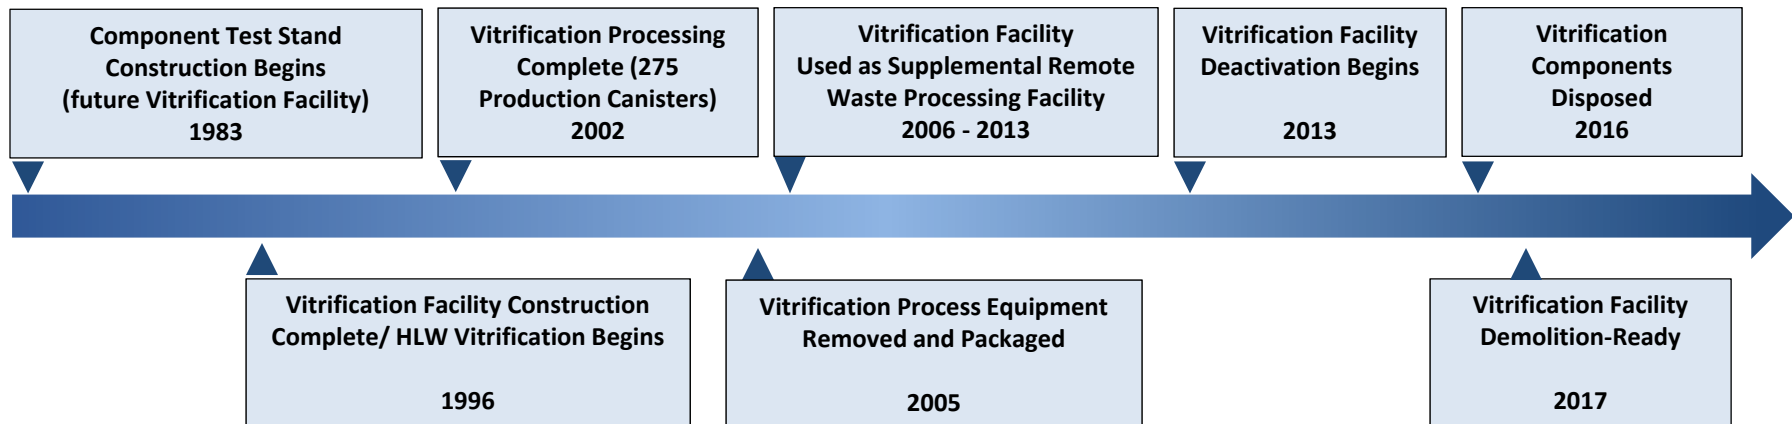

Review of Regulatory Requirements

Regulatory Authority	Citation	Relevancy
U.S. Department of Energy (DOE)	10 CFR 835 – Occupational Radiation Protection	Establishes annual occupational exposure limits for CHBWV employees: <ul style="list-style-type: none"> • 5 rem/year (5,000 mrem/year) for radiological workers* • 100 mrem/year for non-radiological workers
	DOE Order 458.1	Establishes annual exposure limits for members of the public: <ul style="list-style-type: none"> • 100 mrem/year
U.S. Environmental Protection Agency (EPA)	40 CFR 61 (NESHAPS)	Establishes emission standards for radionuclides in air (commonly referred to as Radionuclide National Emission Standards for Hazardous Air Pollutants) <ul style="list-style-type: none"> • 10 mrem/year (sitewide) with EPA approval • 0.1 mrem/year without specific EPA approval • Also sets standards for buildings that contain asbestos
U.S. Nuclear Regulatory Commission (NRC)	West Valley Demonstration Project Act	Establish decommissioning standards for WVDP (complete) and provides for review and consultation regarding WVDP activities
New York State Department of Environmental Conservation (NYSDEC)	6 NYCRR Part 373-3	Establishes standards for interim status operation and closure of hazardous waste management units
	6 NYCRR Part 750-2	Establishes standards for discharge of waste water
U. S. Department of Transportation (USDOT)	49 CFR – Hazardous Materials Regulations	Establishes packaging, labeling, and transportation of hazardous material, including radioactive waste
New York State Department of Labor (NYDOL)	12 NYCRR Part 56	Establishes standards for removal of asbestos

* CHBWV has established an Administrative Control Level of 500 mrem/year for the general workforce and up to 1,000 mrem/year for a portion of the workforce

- Objective
 - To ensure safe and environmentally protective facility demolition in compliance with worker and environmental protection limits, and in keeping with As Low As Reasonably Achievable (ALARA) principles
- Meeting the Objective
 - Characterization
 - Radiological sampling
 - Contamination surveys



Radiological Sampling Inside the Vitrification Facility

- Meeting the Objective (continued)
 - Airborne Dispersion Modeling
 - Used to identify quantity, type and/or location of contamination that can remain in a structure during open-air demolition that results in defined exposure restrictions at surrounding control boundaries for worker and public protection
 - Key variables that effect model results are contamination levels (i.e., source term), contaminant emission rate, and meteorological conditions
 - Contamination levels are controlled through how much pre-demolition decontamination is performed
 - Contaminant emission rate is controlled by the rate at which demolition is performed and the demolition method used
 - Meteorological conditions are based on five years of actual WVDP data
 - Two models utilized
 - AERMOD used to estimate worker dose
 - CAP-88 used to estimate public dose


- Meeting the Objective (continued)
 - Demolition Methods
 - Dismantlement approach (e.g., hammer, saw)
 - Fugitive dust control
 - Application of fixatives during deactivation, prior to demolition and on the waste pile prior to shipment
 - Fogging/misting during demolition
 - Storm and surface water management
 - Weather limitations defined by existing site procedures
 - Air monitoring action levels established through work control documents (e.g., Radiological Work Permit, Work Instruction Package)




Fixative Application in the Vitrification Facility
Crane Room

- Meeting the Objective (continued)
 - Deactivation and Decontamination
 - Residual accessible equipment and hazardous materials removed
 - Decontamination performed on cell walls and floor
 - Environmental release points isolated
 - Penetrations/embedded piping sealed
 - Floor grouted
 - Facility de-energized and isolated
 - Remaining residual contamination “fixed” in place

[VIT DEACT PROGRESS VIDEO LINK](#)

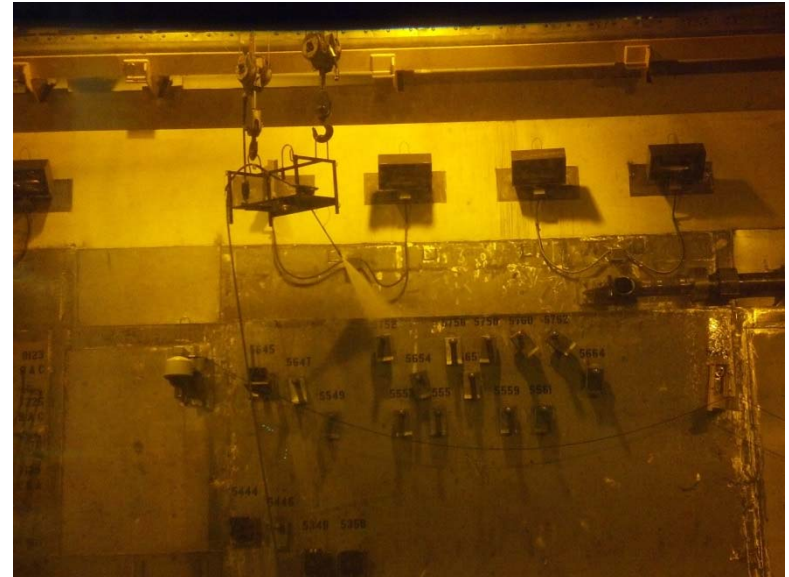


Wall Washing in Progress

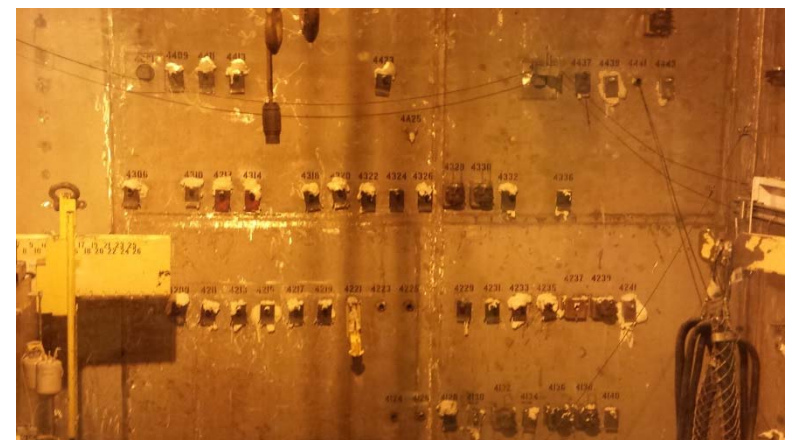

Embedded Piping Sealed

Demolition Preparation (continued)



- CH2M HILL and BWXT have decades of radioactive facility demolition experience and will apply lessons learned during successful demolition of 01-14 Building in 2012-2013
 - Demolition performed by trained and qualified heavy equipment operators using long reach shears and processors



01-14 Building at Start and
Completion of Demolition

- Sequenced Demolition Plan beginning at building exterior
 - Working from least contaminated areas inward toward the most contaminated areas
- Demolition Plan
 - Summarizes the approach for deactivation, decommissioning and demolishing the facility
 - DOE review/approval
 - NRC review/comment



01-14 Building "Outside-to-Inside" Demolition

- Detailed Demolition Safety Planning and Execution
 - Worker protection:
 - Radiological protection – Personal Protective Equipment (PPE), dosimetry, air monitoring
 - Industrial Protection – Plan of the Day, Computer model for Pre-job briefings
 - Area access restricted to necessary personnel
 - Work Instruction Packages define demolition sequences and “Hold Points”



Personnel Monitoring Equipment




Demolition Boundary
Air Monitors




01-14 Demolition Boundary


- Detailed Demolition Safety Planning and Execution (continued)

- Public and Environmental Protection:
 - Restricted site access
 - Air monitoring / Air dispersion modeling program approved by U.S. Environmental Protection Agency (EPA)
 - Real-time monitoring in demolition area
 - Demolition boundary monitoring
 - Off-site perimeter monitoring
 - Storm water management / Dust suppression
 - Daily fixative / cover
 - Limiting size of debris pile / Frequent waste packaging and disposal
 - Fixative application during deactivation (prior to demolition)
 - Detailed final surveys

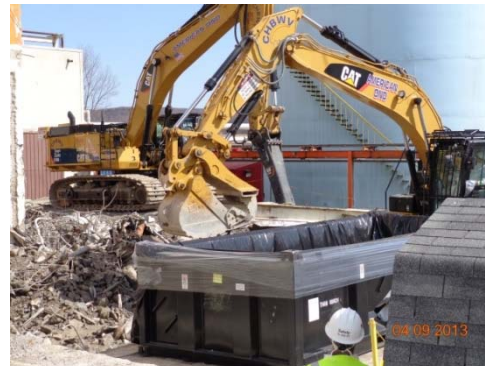

01-14 Building Debris Packaging

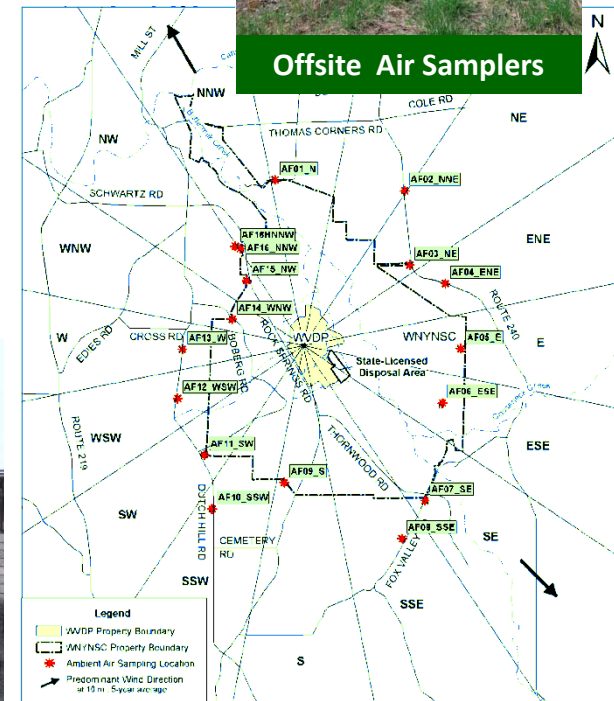

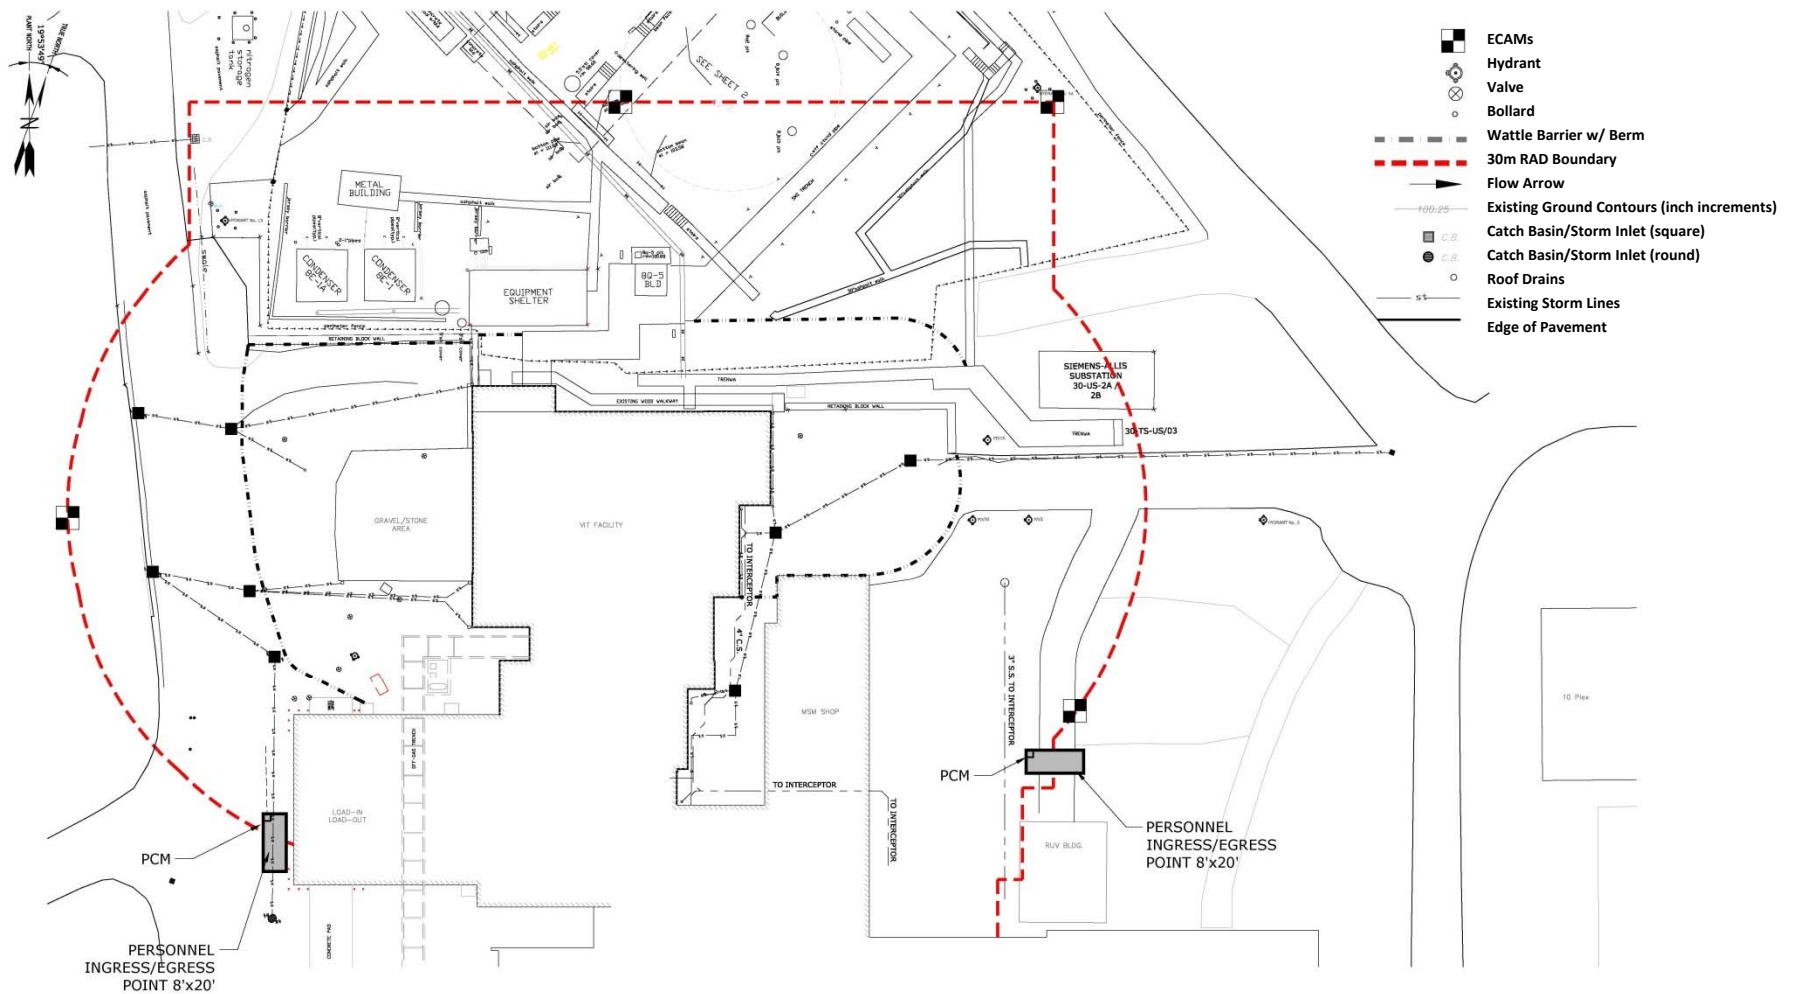

30-meter Area Boundary Includes Facility and Waste Storage/Loading Areas

- Vitrification Facility Specific Waste Disposition Plan Developed
- Vitrification Facility demolition will generate ~6,700 tons of debris
 - Debris piles kept small and packaged or covered daily
 - Debris loading into 25-cubic yard Intermodals
 - All projected to be NRC Class A low level radioactive waste
- Shipment and disposal plans in place
 - Truck or truck-to-rail shipment for disposal at Nevada National Security Site (NNSS), *EnergySolutions* and Waste Control Specialists (WCS) licensed facilities in Nevada, Utah and Texas, respectively
 - Estimate 15 Intermodals per week (450 total shipments)



- Deactivation and Decontamination are 100% Complete
- Vitrification Facility is Demolition Ready
 - Start date contingent upon available funding
 - Approximately 8-month overall schedule to demolish building and ship waste



Demolition Complete



